

# SUPERTRACK

# Z24MK2

## KU-BAND Maritime VSAT Antenna

The SuperTrack Z-Series is the perfect solution for ships looking for broadband speeds at sea. Stay in touch with your networks via high speed access to the internet, email, multiple VoIP phones and more.



\*Design is subject to change without notice



Lower Loss  
Higher Durable  
Radome



High Tracking Speed  
More than 90° / sec



Dual Antenna System  
Support

3 -Year Parts Warranty

## MOST SELECTED VSAT SERIES

The most customers in worldwide maritime industry have chosen SUPERTRACK Z Series MK2 as standard type VSAT System for their vessels. The Z Series MK2 convinces the optimal satellite communication performance to your vessels.

## RELIABILITY, THE BASIC VIRTUE

On the middle of sea, under variable circumstances, the most important merit of communication equipment is reliable connection and stable tracking and network performance. Live chatting with friends, video call with family, listening radio over IP and even... emergency phone calls... all kinds of communication to homeworld require network sustainability with reliable equipment. The SUPERTRACK Z Series, reliable partner all the time.

## COST AFFORDABLE

With all the innovations, SUPERTRACK Z\_Series MK2 has its various line-up and you can fulfil your needs with affordable costs.

## PRODUCT KEY FEATURES

- **Automatic Satellite Search & Skew Control**
- **Brake System**
- **Accurate Signal Acquisition by KNS's Distinctive Algorithm**
- **Pre-programmed Satellite Database**  
Editable 80 satellite data
- **Antenna Control Unit**  
3 Types of Gyro Input (NMEA, Synchro, Step by Step)
- **Unlimited Azimuth**  
Uninterrupted searching keep you in business however you ship turns Cable Wrap Free.
- **Certification/Qualification**  
RoHS
- **C / KU - Band Option Available**



# Z24MK2 KU-BAND Maritime VSAT Antenna

## SPECIFICATIONS

### ABOVE DECK

<b>Dish Diameter</b>	240cm (94.5")
<b>Antenna Dimension</b>	315cm(D) x 308cm(H)
<b>Antenna Weight</b>	530 Kg
<b>Frequency</b>	TX : 13.75 ~ 14.5 GHz RX : 10.7 ~ 12.75 GHz
<b>Antenna Gain</b>	TX : 49.1 dBi @ Mid. Frequency RX : 47.8 dBi @ Mid. Frequency
<b>G / T</b>	27.27 dB/K (In Radome) @ 30deg. Elevation angle and 11.75GHz, Clear Sky
<b>Operating Platform</b>	3 - Axis
<b>LNB</b>	Single PLL LNB
<b>BUC</b>	4W / 6W / 8W / 16W / 25W / 40W (optional)
<b>Skew Control</b>	Automatic Skew Control
<b>Elevation Angle</b>	-10° to +120°
<b>Azimuth Range</b>	Unlimited
<b>Cross Angle</b>	± 35°
<b>Ship Motion</b>	Roll : ±24° at 8-12 sec periods Pitch : ±24° at 6-12 sec periods Yaw : ±8° at 15-20 sec periods
<b>Tracking Speed</b>	More than 90°/sec
<b>Antenna Input Power</b>	90~264V AC 47/63Hz 17A
<b>Temperature</b>	-20°C to +55°C
<b>Humidity</b>	Up to 100% @ 40°C

### PACKING DIMENSION

<b>Packed by</b>	Wooden Crate
------------------	--------------

\*Specification is subject to change without notice


### BELOW DECK

<b>ACU Size</b>	19" Rack 1U size
<b>Gyro Interface</b>	NMEA 0183, Synchro, Step by Step
<b>Input Power</b>	100 ~ 120V AC / 200 ~ 240V AC, 50/60Hz, 8A/4A
<b>External I/O</b>	RS-232C, Mini-USB, Ethernet, Console

### WARRANTY INFORMATION

3-year parts warranty

### RADOME DIMENSION

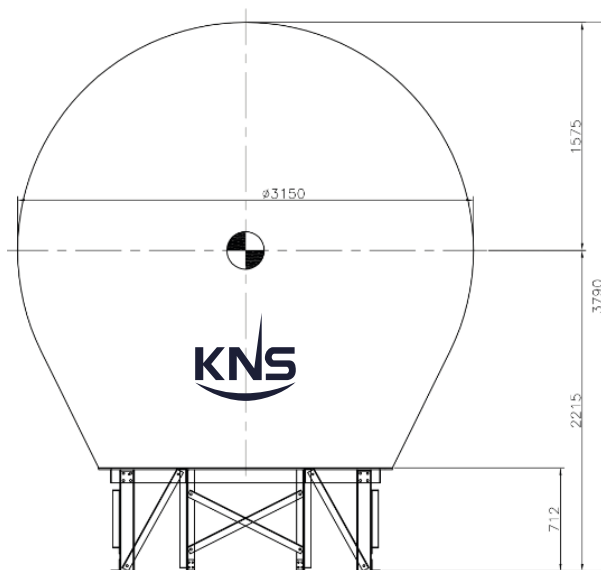

[www.kns-kr.com](http://www.kns-kr.com)

#### KNS Headquarters

1476-55, Yuseong-daero, Yuseong-gu,  
Daejeon South Korea (34055)  
Tel : +82 42 932 0351  
Fax : +82 42 932 0353  
E-mail : sales@kns-kr.com

#### KNS Malaysia Sales Office

20 Jalan Setia Tropika 9/15,  
Taman Setia Tropika, Johor, Malaysia  
Tel : +60 1673 18407  
E-mail : james@kns-kr.com

#### KNS Europe Sales Office

Carl-Zeiss Straße 4, 71093 Weil im  
Schönbuch, Germany  
Tel : +49 1727 640 257  
E-mail : fpollak@kns-kr.com